

HARVIA THE WALL

HSW900400S

This heater has been designed for you who appreciate humid sauna bathing and ambience provided by the sauna scents. One heater provides multiple ways of enjoying sauna. Wall Combi - heater adapts to your personal, friends' and family's sauna preferences. Enjoy sauna just the way you like it.

Advantages

- Versatile combi heater with integrated steamer
- Stable humidity, up to 1 % accuracy
- Streamlined design that reflects Scandinavian minimalism
- Controlled by a separate control unit
- Durable structure and features extend heaters lifespan



Features

Main material : Steel

H x W x D : 710.0 x 380.0 x 355.0 mm

Installation location : Wall

Net weight (kg) : 11.9

Water container volume : 5.0

| ID | GTIN | Output (kW) | Sauna room size min - max m3 |
|------------|---------------|-------------|------------------------------|
| HSW900400S | 6417659022736 | 9 kW | 8.0-14.0 |

Related products



HSW1




Spare parts

| Product | ID | Pcs |
|--|-----------|-----|
| Heating element 3000W/230V | ZCU-830 | 3 |
| Wall mounting bracket, Wall all models | ZWA-058 | 1 |
| Soapstone cup Senator Combi | ZSS-505 | 1 |
| Grid for The Wall heater | ZWA-023 | 1 |
| The Wall E, Air flow spoiler | ZWA-059 | 1 |
| Heating element support for Wall E/Combi | ZWA-077 | 1 |
| Frame modul for Wall Combi, manual | ZWA-111 | |
| Heating element support The Wall E/Combi, AlZn | SPZWA-077 | |
| Grid, The Wall heater | SPZWA-023 | |
| Heating element 3000W 230V | SPZCU-830 | 3 |
| Soapstone cup D75-50 2 pcs Senator Combi, grey | SPZSS-505 | |

Technical details

| Technical data | Type / attribute | HSW900400S |
|------------------------------------|--|-----------------|
| | Color | Stainless Steel |
| | Power output | 9 kW |
| | Stone sizes | Ø5-10 cm |
| | Stone amount (kg) | 20 |
| Dimensions | Product width | 380 |
| | Product height | 710 |
| | Product depth (mm) | 355 |
| | Net weight (kg) | 11.9 |
| | Gross weight | 13.5 |
| | Package width | 460 |
| | Package height | 623 |
| | Package depth | 264 |
| | Water container volume | 5 |
| Safety and installation dimensions | Safety distance front (non-combustible materials) | 20 |
| | Safety distance front (combustible materials) | 20 |
| | Safety distance right side (combustible materials) | 80 |
| | Safety distance right side non-combustible materials | 80 |
| | Safety distance left side (combustible materials) | 80 |
| | Safety distance left side non-combustible materials | 80 |
| | Safety distance side (non-combustible materials) | 80 |
| | safety distance to the side wall (combustible materials) | 80 |
| | Safety distance (Ceiling) | 1200 |
| | Room min. height(depends on connections and therefore from output, star/delta) | 1900 |
| | Installation opening height | 1900 |
| Installation opening width | 540 | |
| Installation opening depth | 375 | |

Technical images

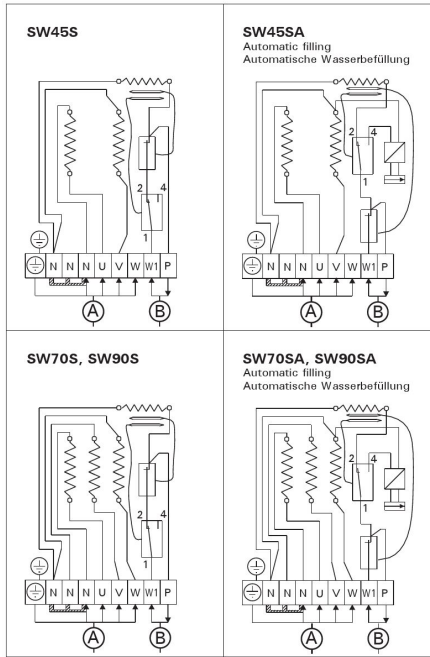


| | min. mm | | | | |
|--------------|---------|----|----|----|------|
| | A | B | C | D | E |
| SW45S/SW45SA | 20 | 20 | 35 | 80 | 1200 |
| SW70S/SW70SA | 20 | 20 | 70 | 80 | 1200 |
| SW90S/SW90SA | 20 | 20 | 80 | 80 | 1200 |

Safety distances (all dimensions in millimeters)

| Heater Ofen | Output Leistung kW | Heater output Ofenleistung kW | Steamer output Verdampferleistung kW | Fuses Sicherungen A | Cables Kabel 400 V 3N~ mm ² |
|----------------|--------------------------|-------------------------------------|--|---------------------------|---|
| | | | | | (A) (B) (A)+(B) |
| SW45S/ SW45SA | 4,5 | 2 x 2260 W | 2,0 | 3 x 10 | 5 x 1,5 2 x 1,5 7 x 1,5 |
| SW70S/SW70SA | 7,0 | 3 x 2260 W | 2,0 | 3 x 10 | 5 x 1,5 2 x 1,5 7 x 1,5 |
| SW90S/SW90SA | 9,0 | 3 x 3000 W | 2,0 | 3 x 16 | 5 x 2,5 2 x 2,5 7 x 2,5 |

Electrical connections

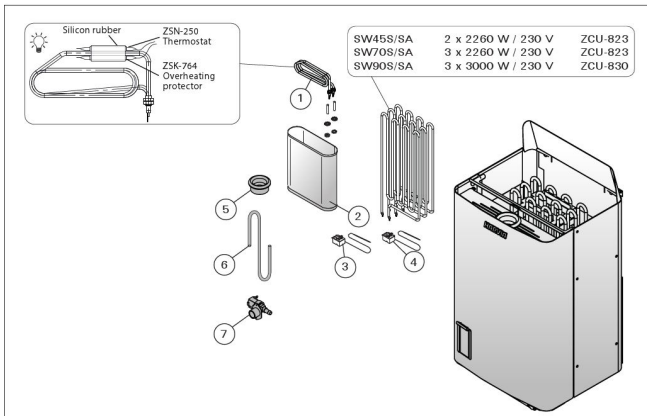

| Part No. | Description | Specification | Code | Qty |
|----------|---------------------------------------|---------------------------------------|---------|-----|
| 1 | Evaporator heating element, assembled | Heizelement des Verdampfers, montiert | ZH-104 | 1 |
| 2 | Water reservoir | Wassertank | ZCU-115 | 1 |
| 3 | Thermostat 110 °C | Thermostat 110 °C | ZSN-250 | 1 |
| 4 | Overheating protector | Überhitzungsschutz | ZSK-764 | 1 |
| 5 | Soapstone cup | Specksteinbecher | ZSS-505 | 1 |
| 6 | Drain hose | Entleerungsrohr | ZH-175 | 1 |
| 7 | MG valve | Magnetventil | ZSS-610 | 1 |

We recommend to use only the manufacturer's spare parts.